


HIVE® 300/310 MHz Receiver

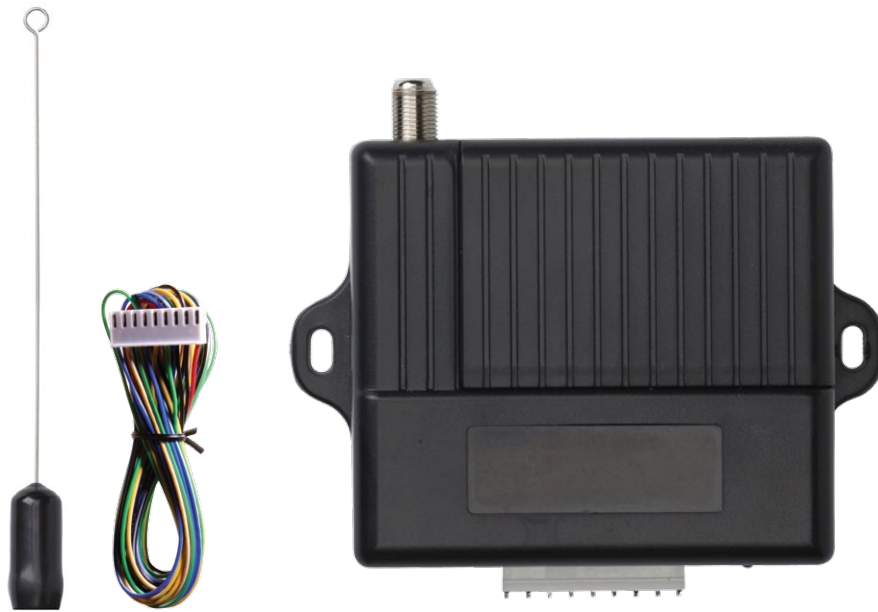

Stand Alone Dip Switch Receiver

The Hive® 300/310 receiver is designed for gate and commercial door operators and provides a high performance, affordable security solution. The Hive receiver is designed specifically for commercial applications and is sure to provide ease of use and longevity in the field. The receiver has two channels, operates at 12-24 VAC/DC power with an auto detect feature of the voltage input, and is compatible with Multicode® and Linear® 300 and 310 MHz transmitters.

FEATURES

- 2-Channels
- Compatible with Multicode®, Linear® & Stanley®
- Voltage Auto Detect
- Includes Coax Antenna & Wiring Harness
- 12-24 VAC/DC
- 300 MHz (10 dip switch)
- 310 MHz (8 dip switch)

HIVE[®] 300/310 MHz Receiver

Specifications

Output Load Max:

15A/125AC

Input Load:

12-24 VAC/DC

Power Consumption:

32mA (Not Active)

70mA (Active)

Max Applicable Power:

25VDC


Operating temperature:

-40°F - 158°F

Dimensions:

3" (W) x 3 1/2" (L) x 1 1/4" (D)

Dimensions

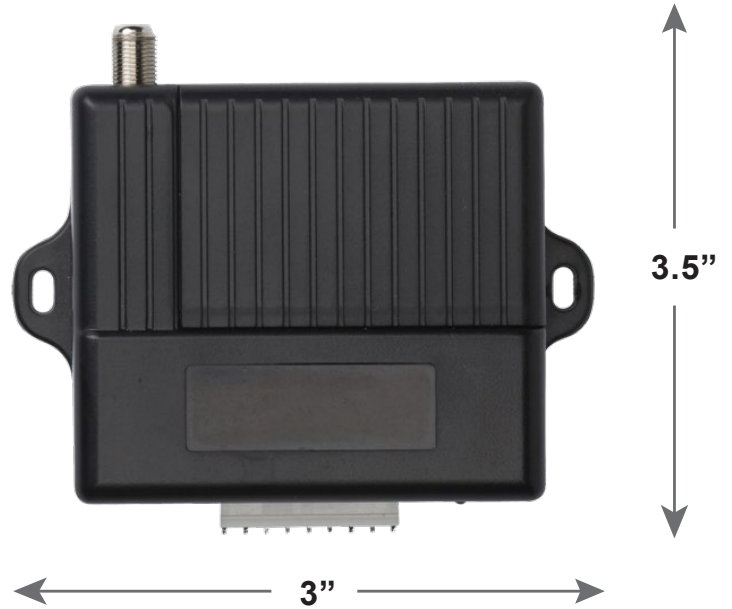

Wiring Diagram

